

BATIK INTEGRAL


OutFit / Multideck
Integral




BEST ENERGY CLASS*




Product Categories



Cheese



Dairy
products



Delicatessen



Drinks



Pastries



Pre-packed
fruit and
vegetables



Sandwiches

Technical Features



High
efficiency
fans



Incorporated
condensing
unit



LED lighting



Natural
Defrost Plus



Propane
refrigerant
gas (R290)




Ventilated


Product Range

BATIK INTEGRAL					
Length-Lunghezza Longueur-Länge-Longitud mm			1250	1875	2500
Height-Altezza-Hauteur-Höhe-Altura mm			1200	1200	1200
BATIK INTEGRAL	DESIGN	C	•	•	•
		N	•	•	•
	STUDIO	C	•	•	•
		N	•	•	•
Display area Superficie di esposizione Warenpräsentations- fläche Surface d'exposition Superficie expositiva m²	Compact		1.39	2.10	2.79
	Narrow		1.52	2.29	3.04
Loading area Superficie di appoggio Nutzfläche Surface de chargement Superficie de apoyo m²	Compact		1.30	1.95	2.60
	Narrow		1.42	2.13	2.85
End thickness Spessore spalla Stärke der Seitenwand Épaisseur de chaque joue Espesor lateral mm			30.00 (+ 35 Batticarrello/Bumper Rail/Pare-choc/Wagen- stoßleiste/Parachoques)		


Cross Sections

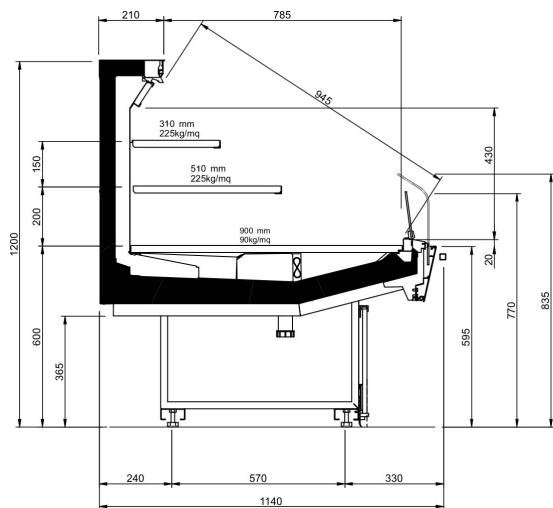


BATIK INTEGRAL N STUDIO

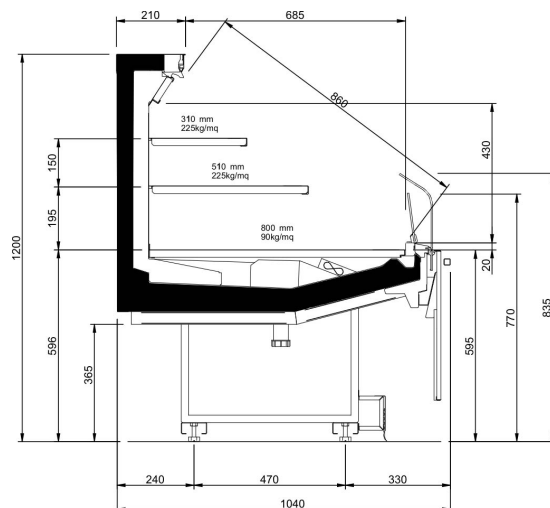

BATIK INTEGRAL C DESIGN

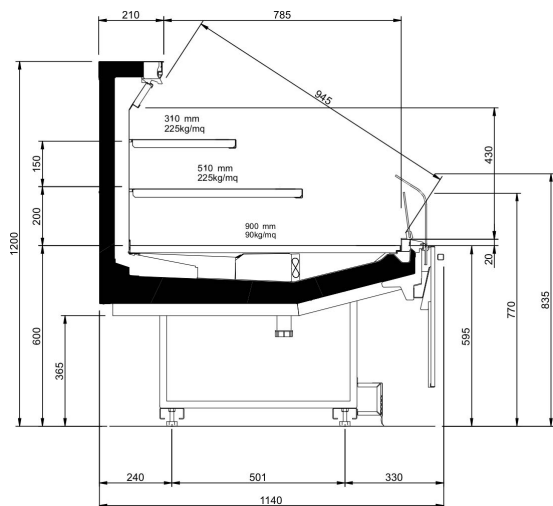

BATIK INTEGRAL N DESIGN

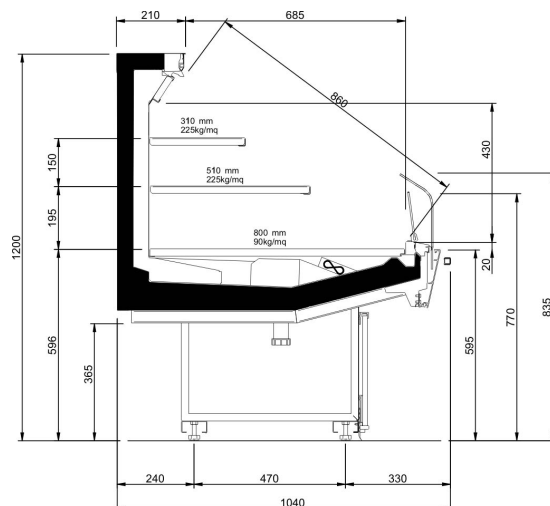

BATIK INTEGRAL C STUDIO

*The information on the energy class (according to EU regulations 2019/2018 and EU 2019/2024) reported here refers to standard models and precise product configurations and set-ups. The site is based on the information available at the time of publication. As the energy class depends on the specific product configuration, despite the efforts made to ensure the greatest possible accuracy, the real data can differ significantly from the data declared here. For further information, we invite you to consult the European Product Database for Energy Labelling (EPREL) or to contact our Sales Office.