

SILK N

OutFit / Serve-over counters


Serve-over



BEST ENERGY CLASS*




Product Categories




Cheese



Chicken



Dairy
products



Delicatessen



Meat



Pre-packed
fruit and
vegetables

Technical Features




High
efficiency
fans



LED lighting



Off-cycle
defrost



Remote
condensing
unit



Ventilated

SILK N


OutFit / Serve-over counters

Serve-over


Product Range

SILK N					
Lenght -Lunghezza Longueur-Länge-Longitud mm	1250	1875	2500	3750	EOL 1890
LOADING LINE 235	•	•	•	•	•
MAX - LOADING LINE 365	•	•	•	•	•
Dispaly area Superficie di esposizione Warenpräsentationsfläche Surface d'exposition Superficie expositiva m2	2.29	3.45	4.58	6.87	1,88
Loading area Superficie di appoggio Nutzfläche Surface de chargement Superficie de apoyo m2	2.36	3.54	4.72	7.08	1.6
End thickness Spessore spalla Stärke der Seitenwand Épaisseur de cheque joue Espesor lateral mm	50.00				


Cross Sections

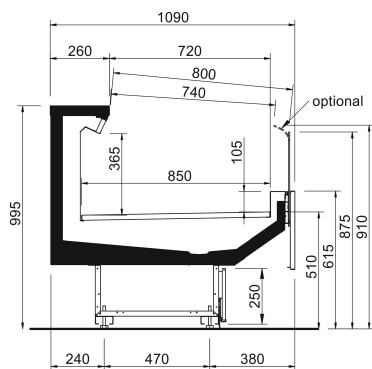


Sezione Silk N_MAX_MT

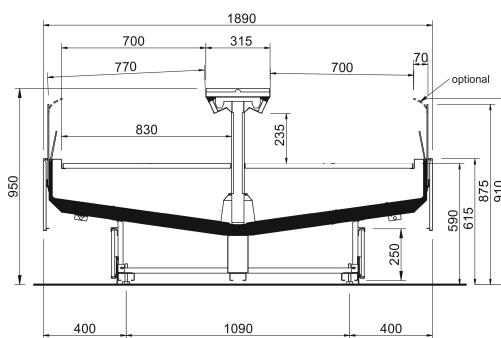

Sezione Silk N_STD_lineare

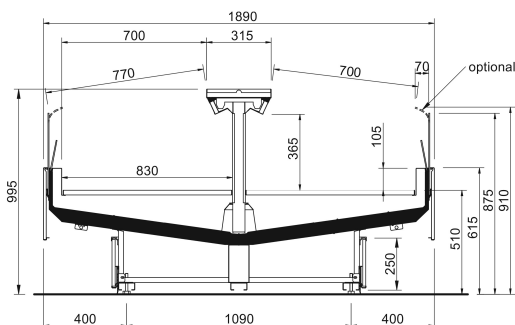

Sezione Silk N_MAX_lineare

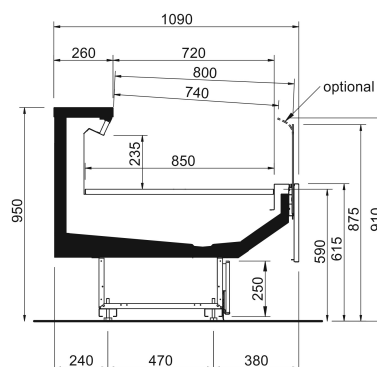

Sezione Silk N_STD_MT



Silk_Dualio_02_Systeme U Vernaissou



Silk_Dualio_01_Systeme U Vernaissou

OutFit / Serve-over counters

Serve-over

*The information on the energy class (according to EU regulations 2019/2018 and EU 2019/2024) reported here refers to standard models and precise product configurations and set-ups. The site is based on the information available at the time of publication. As the energy class depends on the specific product configuration, despite the efforts made to ensure the greatest possible accuracy, the real data can differ significantly from the data declared here. For further information, we invite you to consult the European Product Database for Energy Labelling (EPREL) or to contact our Sales Office.