

VELVET C STYLE

OutFit / Serve-over counters


Serve-over




BEST ENERGY CLASS*



Product Categories

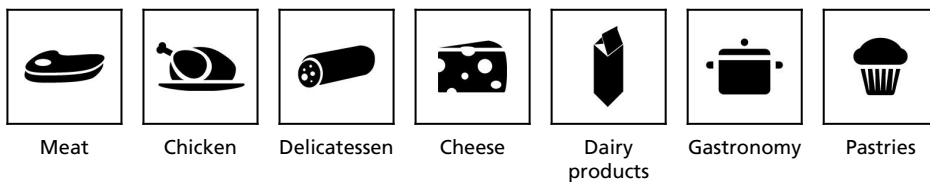

Technical Features

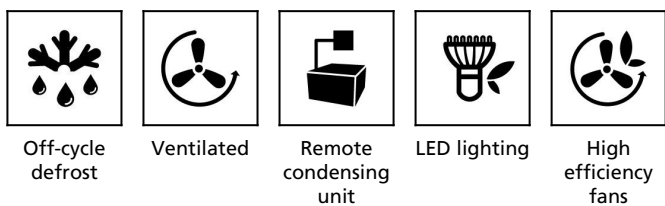

VELVET C STYLE

OutFit / Serve-over counters

Serve-over

Certification and Patents



Epta
Adamant



Eurovent



TechnoKleen

Product Range


VELVET C STYLE									
Length-Lunghezza Longueur-Länge-Longitud mm	937	1250	1875	2500	3125	3750	MAA 90°	MAA 45°	MAC 45°
RDB	•	•	•	•	•	•			
RDA	•	•	•	•		•	•	•	
WO	•	•	•	•		•		•	•
RDBP	•	•	•	•		•	•	•	•
RCB	•	•	•	•	•	•	•	•	•
LS	•	•	•	•	•	•	•	•	•
Display area Superficie di esposizione Warenpräsentationsfläche Surface d'exposition Superficie expositiva m2/ml	0.75								
Loading area Superficie di appoggio Nutzfläche Surface de chargement Superficie de apoyo m2/ml	1.01								
End thickness Spessore spalla Stärke der Seitenwand Épaisseur de cheue joue Espesor lateral mm	55.00								

VELVET C STYLE

OutFit / Serve-over counters


Serve-over

Cross Sections

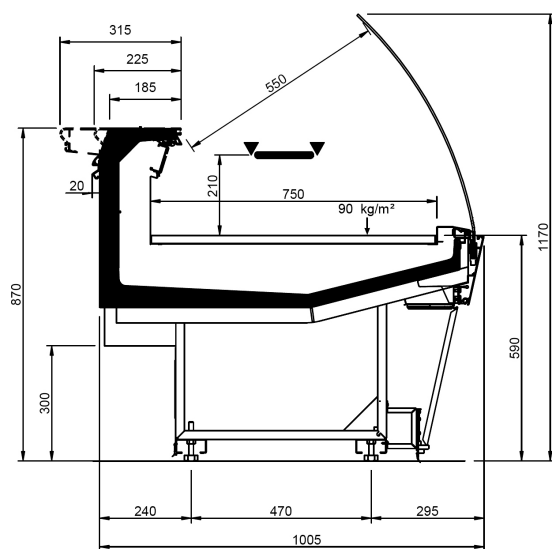


Velvet C Style RCB

WO FEET

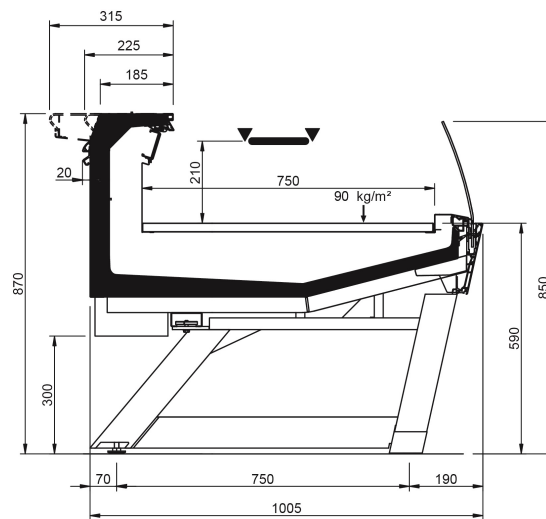

Velvet C Style piedi LS-C

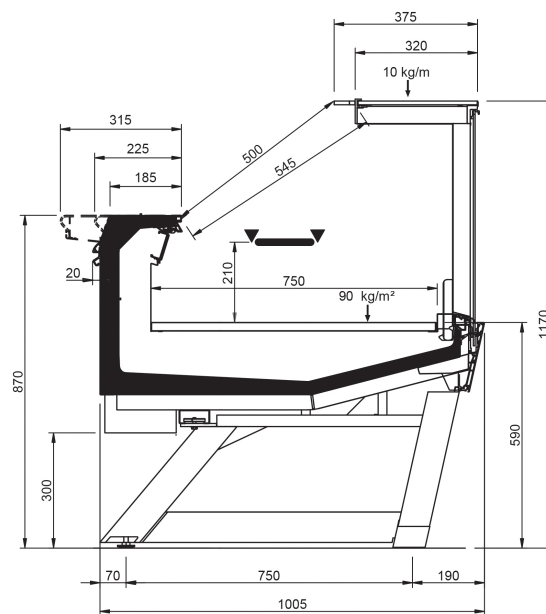


RDB FEET


VELVET C STYLE

OutFit / Serve-over counters


Serve-over

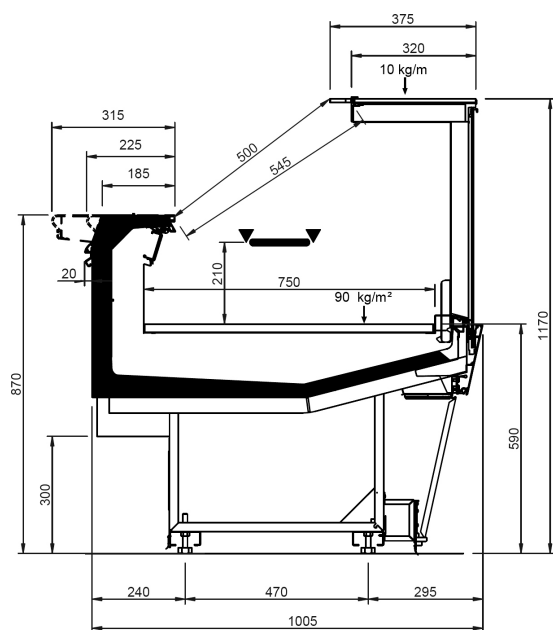


Velvet C Style RDB

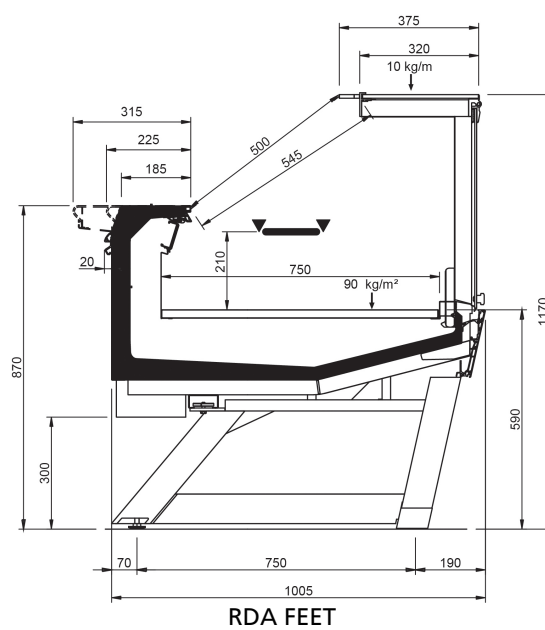

RDA FEET

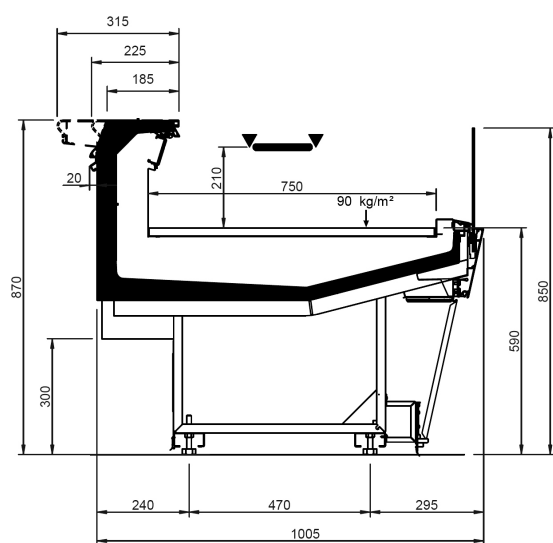

Velvet C Style LS-D

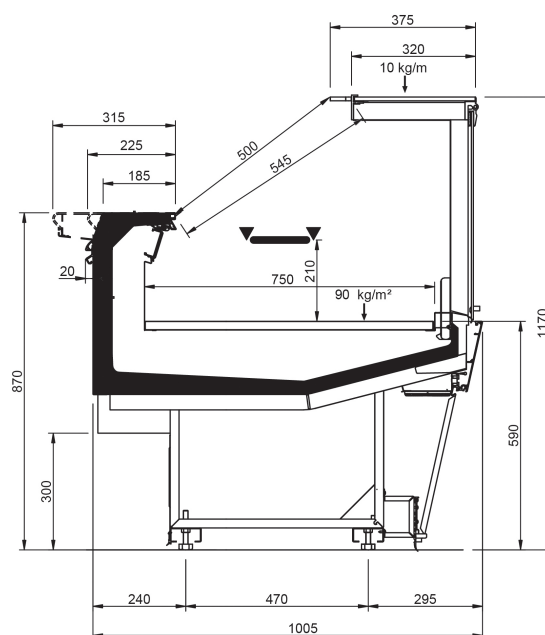


Velvet C Style RDA

VELVET C STYLE

OutFit / Serve-over counters


Serve-over

 RDBP

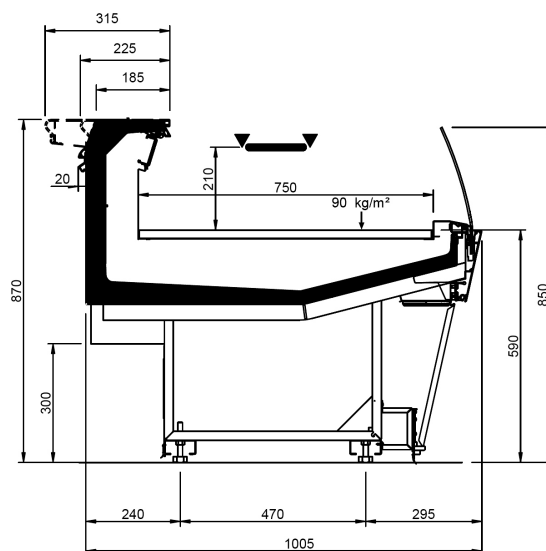

Velvet C Style LS-C

 Velvet C Style con piedi LS-D

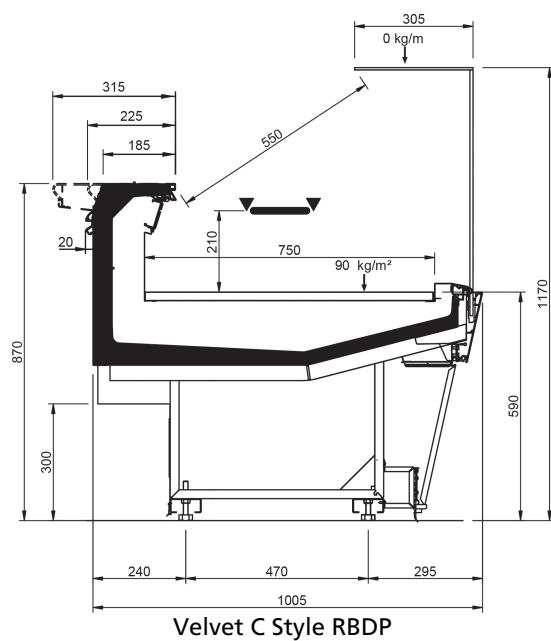


Velvet C Style RBDP

VELVET C STYLE


OutFit / Serve-over counters

Serve-over

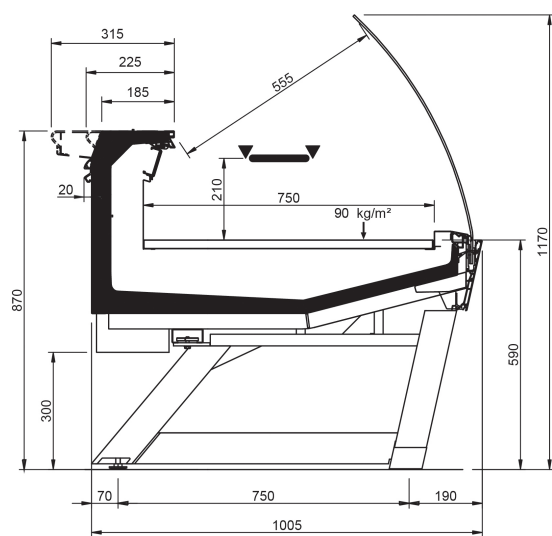

Velvet C Style con piedi RCB

Velvet C Style LS-U

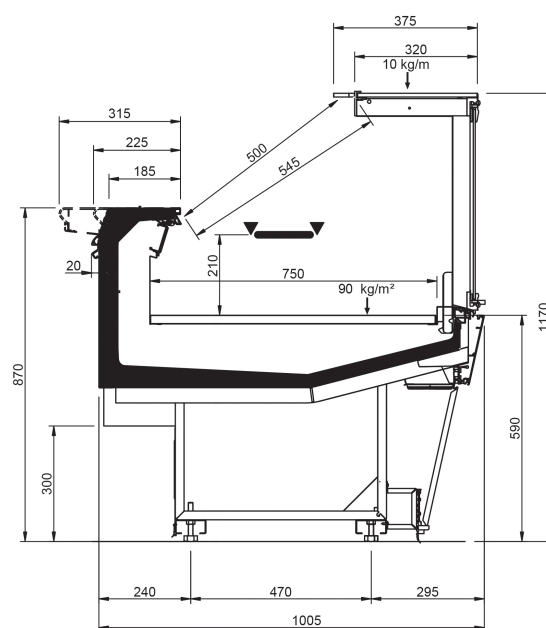

Velvet C Style WO

Velvet C Style Legs LS-U

*The information on the energy class (according to EU regulations 2019/2018 and EU 2019/2024) reported here refers to standard models and precise product configurations and set-ups. The site is based on the information available at the time of publication. As the energy class depends on the specific product configuration, despite the efforts made to ensure the greatest possible accuracy, the real data can differ significantly from the data declared here. For further information, we invite you to consult the European Product Database for Energy Labelling (EPREL) or to contact our Sales Office.