

VELVET L DESIGN

OutFit / Serve-over counters

Serve-over



BEST ENERGY CLASS*




NEW DESIGN EVOLUTION VERSION


Product Categories



Cheese



Dairy products



Delicatessen



Gastronomy



Meat



Pastries



Chicken

Technical Features




High efficiency fans



LED lighting



Off-cycle defrost



Remote condensing unit



Ventilated

VELVET L DESIGN

OutFit / Serve-over counters

Serve-over

Certification and Patents



Eurovent



TechnoKleen



Epta
Adamant

Product Range


VELVET L DESIGN							
Length-Lunghezza Longueur-Länge-Longitud mm	937	1250	2500	3750	MAA 90°	MAA 45°	MAC 45°
RDB	•	•	•	•			
RDA	•	•	•	•	•	•	
WO	•	•	•	•		•	•
RCB	•	•	•	•	•	•	•
RCA	•	•	•	•	•	•	•
LS	•	•	•	•	•	•	•
Display area Superficie di esposizione Warenpräsentationsfläche Surface d'exposition Superficie espositiva m2/ml	0.95						
Loading area Superficie di appoggio Nutzfläche Surface de chargement Superficie de apoyo m2/ml	1.21						
End thickness Spessore spalla Stärke der Seitenwand Épaisseur de cheue joue Espesor lateral mm	35.00						

VELVET L DESIGN


OutFit / Serve-over counters

Serve-over


Cross Sections

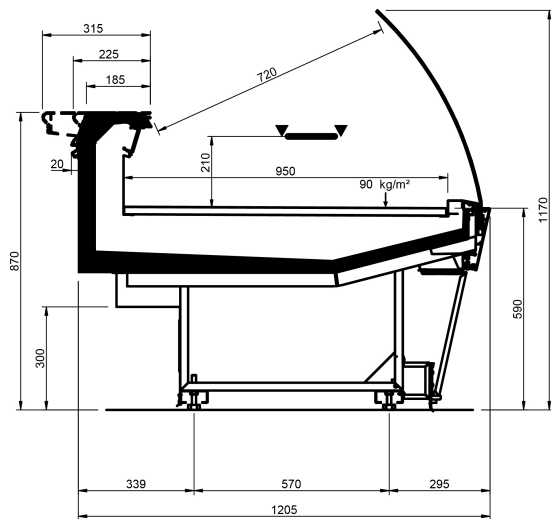


Velvet L Design RCB

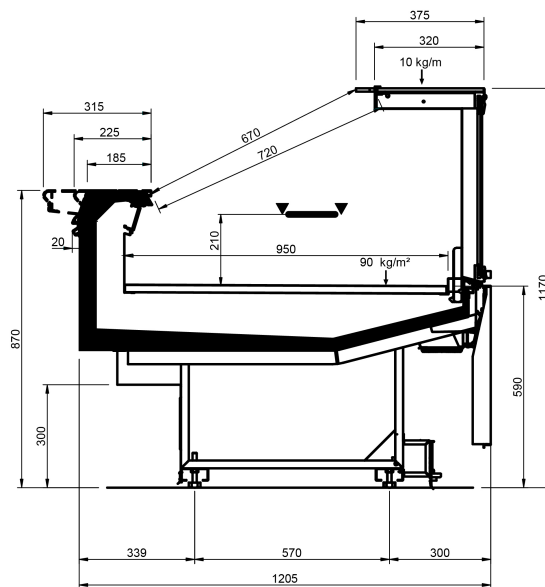

Velvet L Design WO

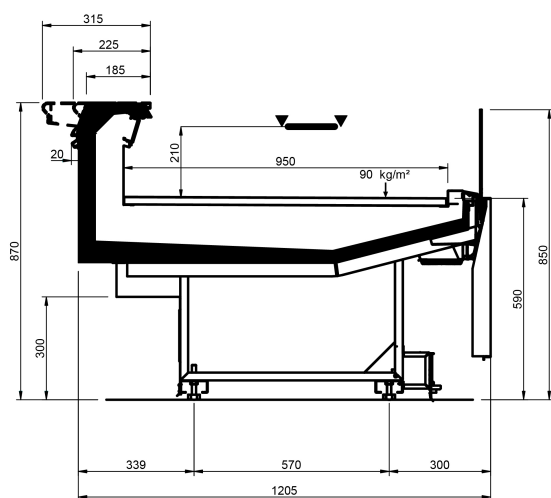

Velvet L Design LS-D

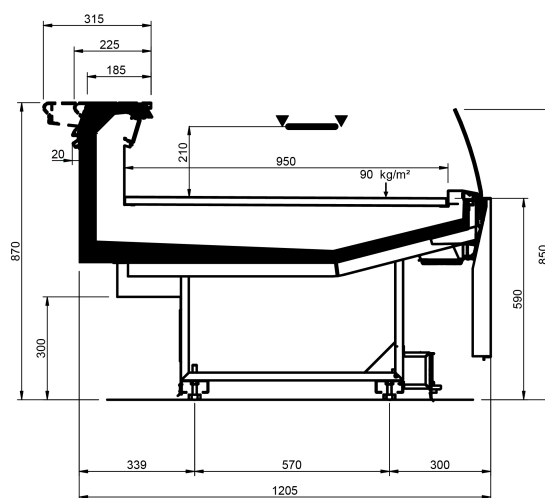


Velvet L Design LS-C


VELVET L DESIGN

OutFit / Serve-over counters


Serve-over

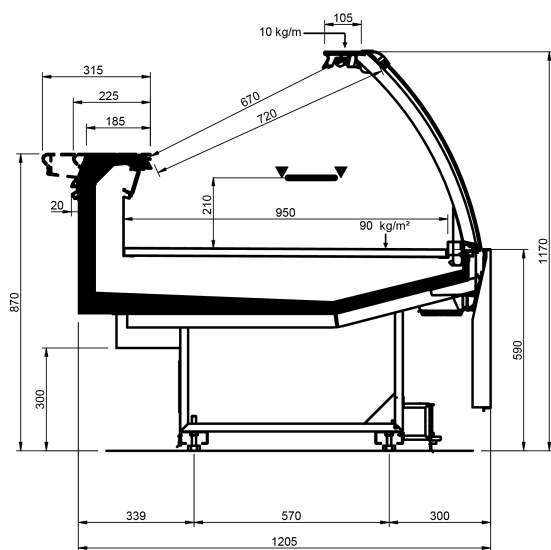


Velvet L Design RCA

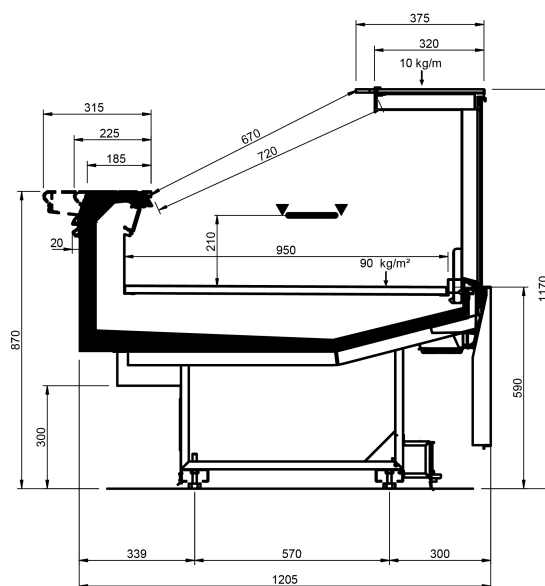

Velvet L Design RDB

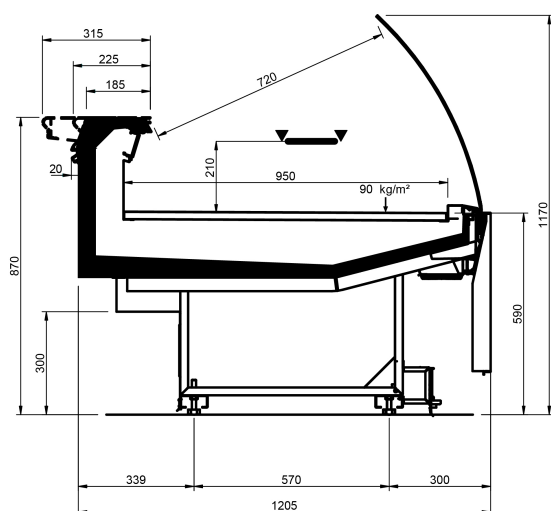

Velvet L Shape V Design RCB

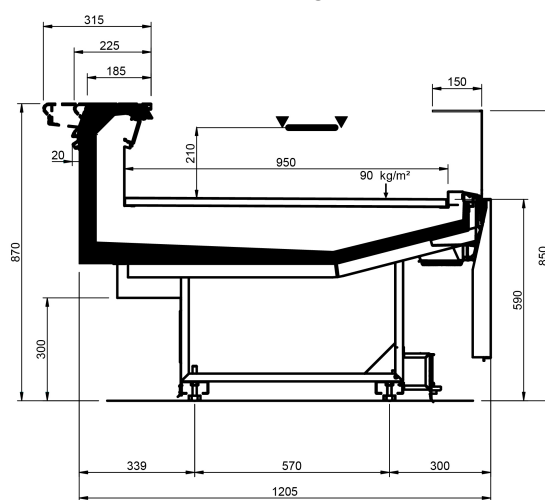


Velvet L Design LS-U

VELVET L DESIGN

OutFit / Serve-over counters

Serve-over

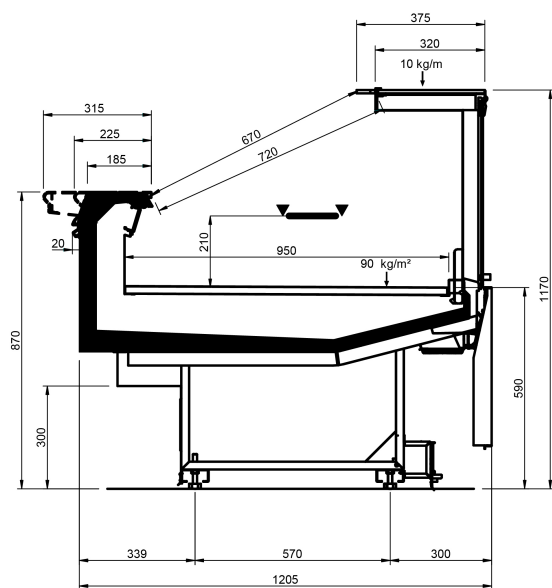

Velvet L Design RDA

*The information on the energy class (according to EU regulations 2019/2018 and EU 2019/2024) reported here refers to standard models and precise product configurations and set-ups. The site is based on the information available at the time of publication. As the energy class depends on the specific product configuration, despite the efforts made to ensure the greatest possible accuracy, the real data can differ significantly from the data declared here. For further information, we invite you to consult the European Product Database for Energy Labelling (EPREL) or to contact our Sales Office.