

VELVET N CONV D

OutFit / Serve-over counters

Serve-over



BEST ENERGY CLASS*



NEW **DESIGN EVOLUTION** VERSION


Product Categories




Meat




Chicken



Delicatessen



Cheese



Dairy
products



Gastronomy



Pastries


Technical Features



Off-cycle
defrost



Ventilated



Remote
condensing
unit



LED lighting



High
efficiency
fans

VELVET N CONV D

OutFit / Serve-over counters

Serve-over

Certification and Patents



Eurovent



Cabrio Glass



TechnoKleen




Epta
Adamant


Product Range

VELVET CONV D					
Length -Lunghezza Longueur-Länge-Longitud mm	937	1250	1875	2500	3750
DESIGN	•	•	•	•	•
STUDIO	•	•	•	•	•
STYLE	•	•	•	•	•
Display area Superficie di esposizione Warenpräsentationsfläche Surface d'exposition Superficie expositiva m2/ml	0.85				
Loading area Superficie di appoggio Nutzfläche Surface de chargement Superficie de apoyo m2/ml	1.08				
End thickness Spessore spalla Stärke der Seitenwand Épaisseur de cheue joue Espesor lateral mm	55.00 Style-Studio / 35.00 Design				


Cross Sections

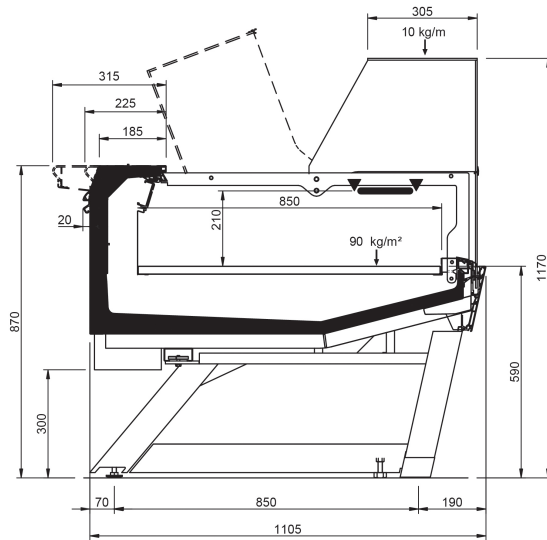


Style legs

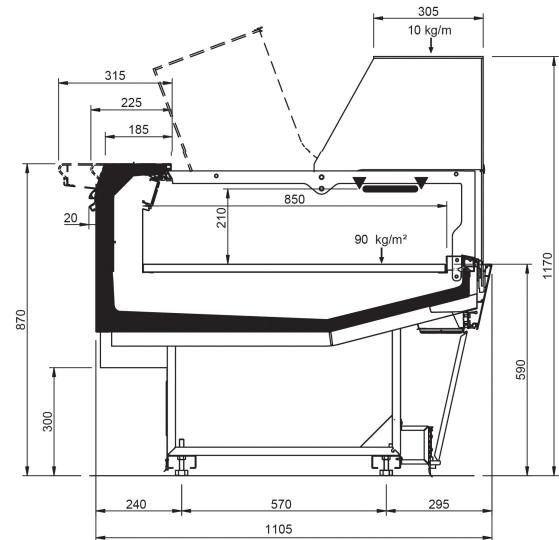

Style

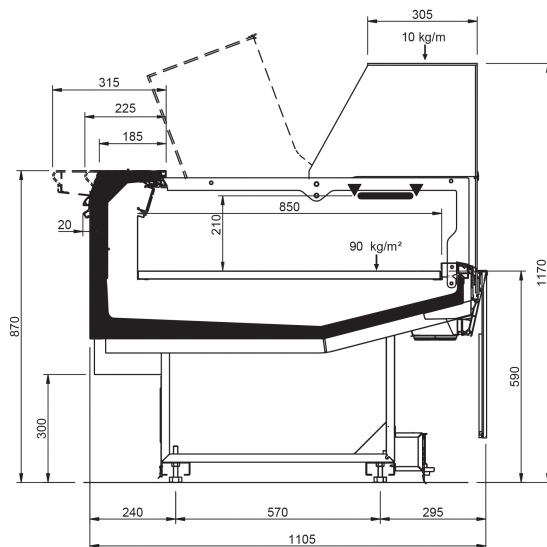

Design

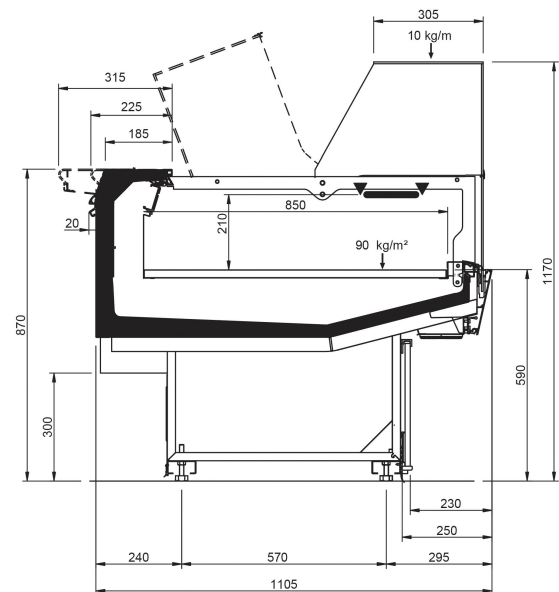


Studio


VELVET N CONV D

OutFit / Serve-over counters


Serve-over

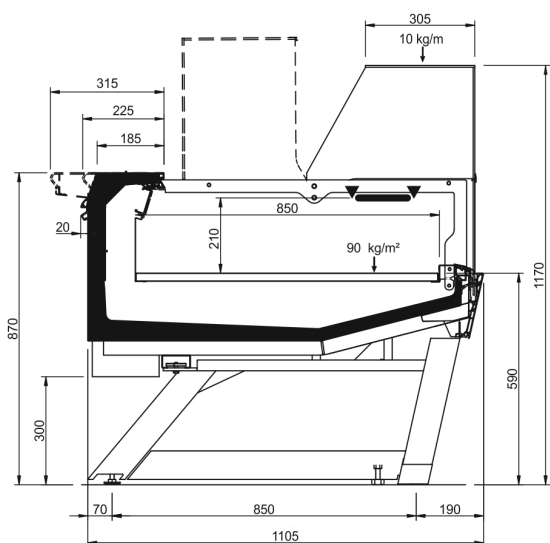


Sezione Velvet Conv D_piano orizzontale_style legs

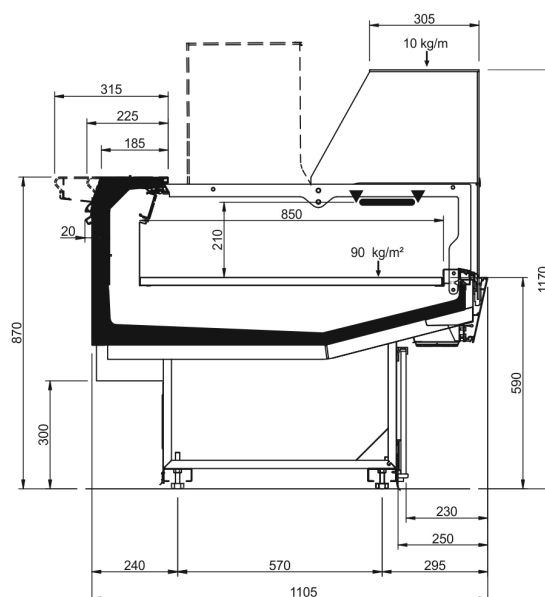

Sezione Velvet Conv D_piano orizzontale_studio

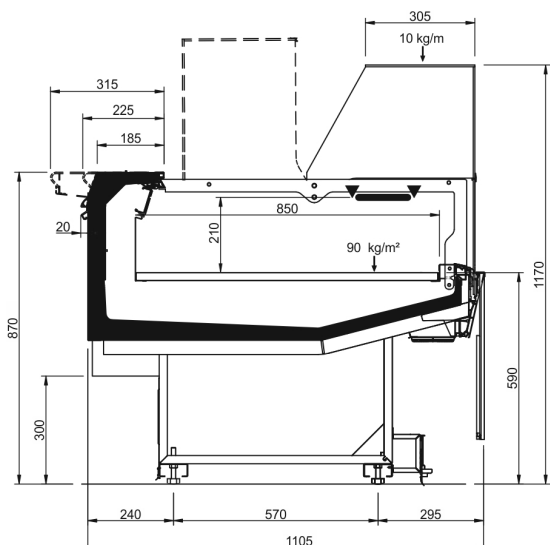

Sezione Velvet Conv D_piano orizzontale_design

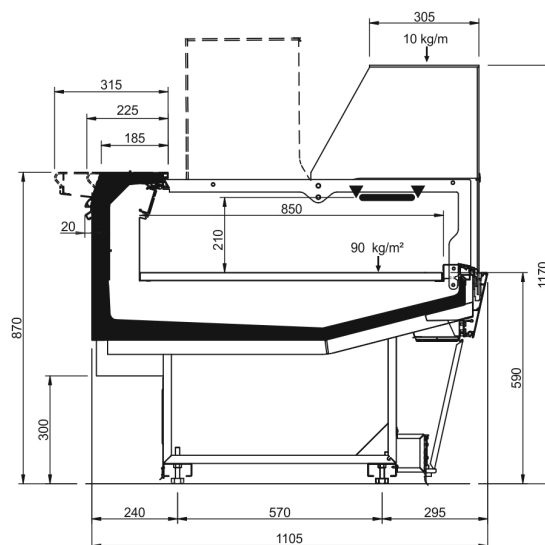

Sezione Velvet Conv D_piano orizzontale_style

*The information on the energy class (according to EU regulations 2019/2018 and EU 2019/2024) reported here refers to standard models and precise product configurations and set-ups. The site is based on the information available at the time of publication. As the energy class depends on the specific product configuration, despite the efforts made to ensure the greatest possible accuracy, the real data can differ significantly from the data declared here. For further information, we invite you to consult the European Product Database for Energy Labelling (EPREL) or to contact our Sales Office.